

12/24 Port Fiber Optic Patch Panel


Mesh-Link 12/24 port Sliding Patch Panel is suitable for SC/LC and can be ordered for ports such as ST or FC type. The panel can also be pre-loaded completely with the required adapter and simple management kit. The sliding system in its basic form can be supplied with or without adapters. The tray is locked in place and has two plastic catches for simple installation. When fully extended the tray is designed to lower at 45 degrees or move the tray to the side and locks at 10 degrees only. It fully provides a perfect working flat form for simple installation and easy maintenance.

Features

- Recessed Panel and Adapters option with better bend radius
- No exposed screws on top
- 45 degrees working angle
- Multifunctional rear cable entry options
- 4 Cable Entries (2XPG16, 2XPG13.5)

Applications

- Telecommunication networks
- FTTH
- LAN, WAN, CATV networks
- Telco Pigtail standard
- Active device termination

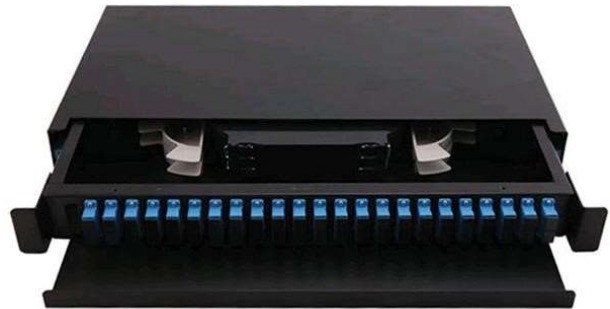

Specification

ELEMENT	12 Port and 24 Port
U Size	1U (44.4mm)
Width	483mm
Depth	293mm
Weight	3.05kgs fully
Packaged Dimensions	450mm W X 55mm H x 260mm D
IP Rating	IP20
Adapter Options	SC /FC/ST/LC
Number of ports	12 / 24
Cable Entry 20mm	2
Mounting adjustment range	50mm
Material	Cold Rolled Steel
Material thickness	1.1mm
Material coating	Powder coating
Colour	Black RAL 9004
Operating Temperature	-40°C to + 50°C
Compliant to	RoHS, Reach / SVHC
Designed in accordance	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

Ordering information

Part No.	Description
FOPA-12D-X	12 Port Fiber Patch Panel with splice tray for SC/FC/ST/LC Adaptors 19 inch Rack Mount - Unloaded
FOPA-24D-X	24 Port Fiber Patch Panel with splice tray for SC/FC/ST/LC Adaptors 19 inch Rack Mount - Unloaded